SINGLE DOOR SETUP

MIN. TIMBER HEAD=
DOOR THICKNESS + 8mm

33

3

DOOR
THICKNESS

SLIDING DOOR

POSITION DOOR STOP
SO THAT FINGER PULL
IS NOT BLOCKED BY WALL

TWO DOORS ON TWIN PARALLEL TRACKS

33

3

INSIDE

OUTSIDE

DOOR THICKNESS

DOOR THICKNESS

97-728 DOOR STOP (AT MID-HEIGHT)
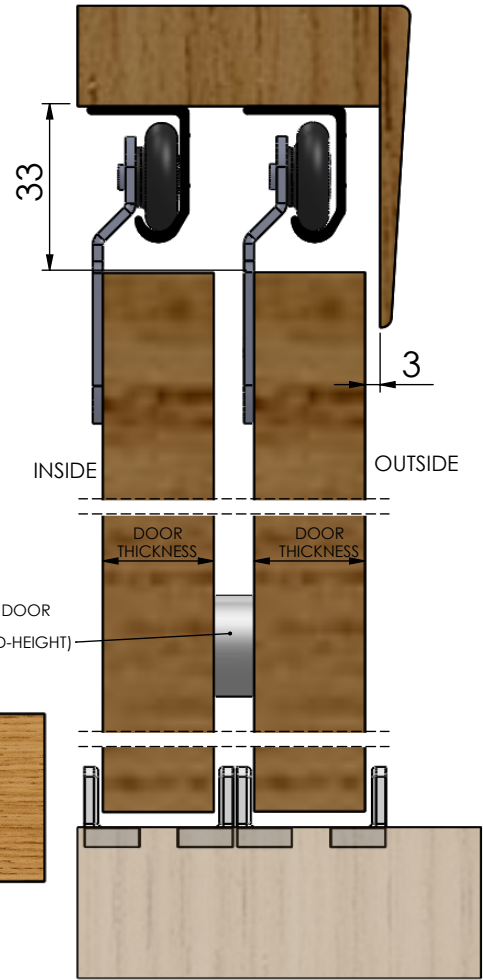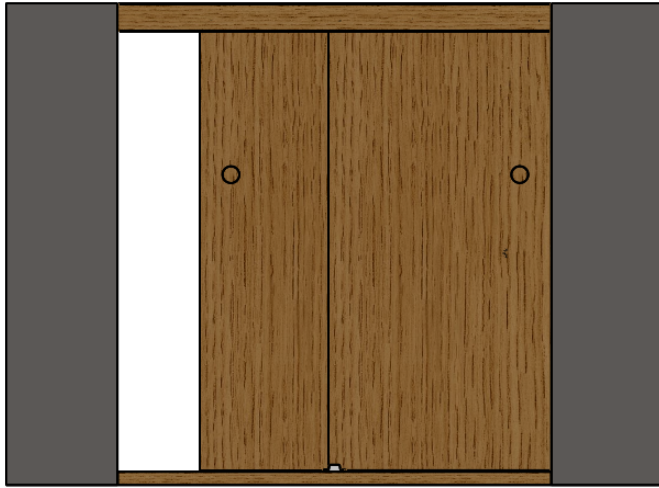
TO OBTAIN 25mm LAP, EACH DOOR SHOULD BE EQUAL TO HALF WIDTH OF OPENING PLUS 12mm

25

FRONT DOOR
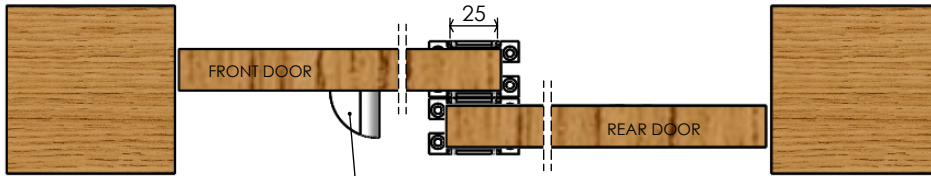
REAR DOOR

POSITION DOOR STOP SO THAT FRONT DOOR DOES NOT PASS OVER FINGER PULL IN REAR DOOR

THREE DOORS ON 3 PARALLEL TRACKS
USING CHANNEL AND EDGE FIXING GUIDE

33

3

FRONT DOOR

25

MIDDLE DOOR

25

REAR DOOR

OPENING WIDTH

DOOR THICKNESS

DOOR THICKNESS

DOOR THICKNESS
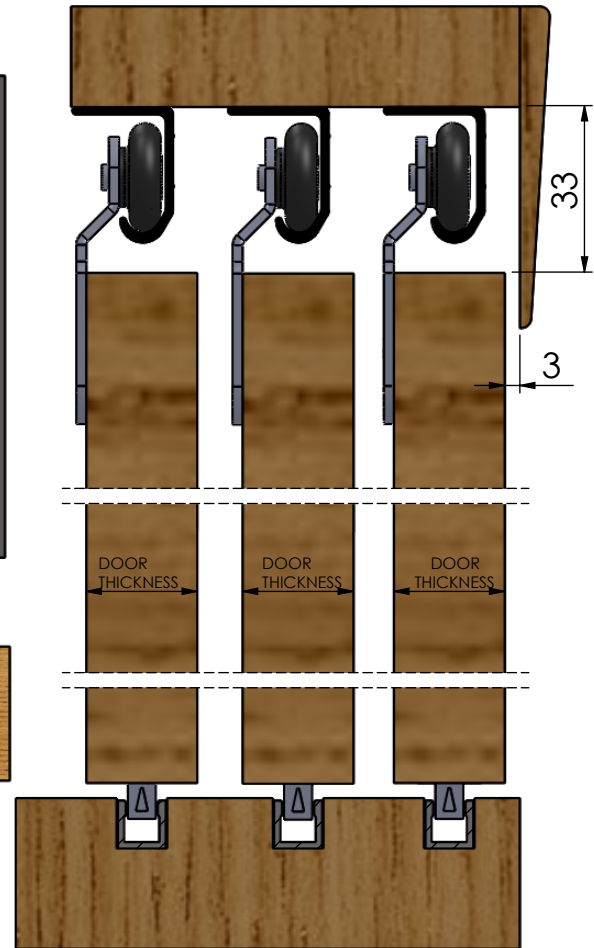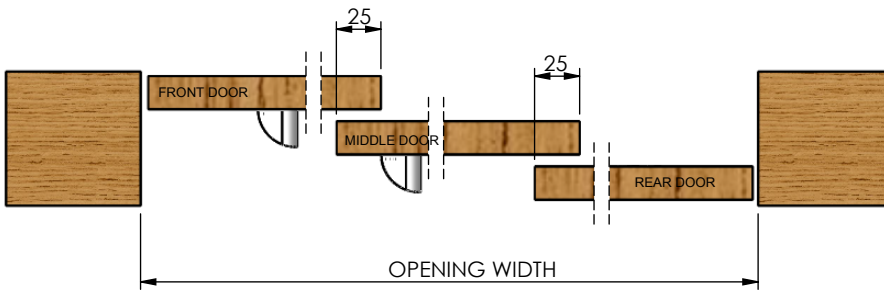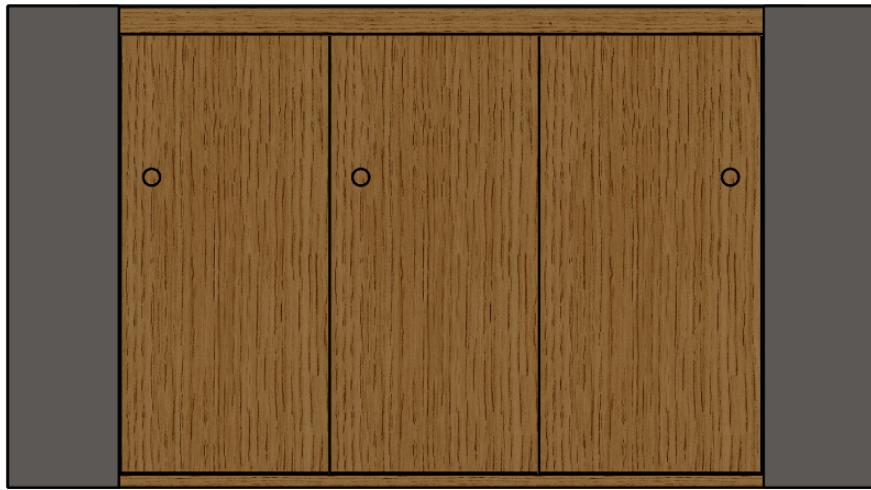
GUIDES; ALTERNATIVE SETUP

3

4

22-391 NYLON
GUIDE

GUIDES REBATED INTO THE FLOOR

7

22-391 NYLON
GUIDE

GUIDES SURFACE FIXED

40-374 EDGE
FIXING GUIDE

3

10

10

41-2 ALUMINIUM
CHANNEL

**ALTERNATIVE GUIDE USING ALUMINIUM CHANNEL
(NOT STANDARD IN PACK)**

3

3

12

4

22-391 NYLON
GUIDE

**GUIDE SETUP FOR GROOVED
DOOR**