

# FIRE RATED JAMB KIT



- MDF Fire Rated Jamb Kit for Single FD30 Rated Doors
- Fully certified to EN 1634-1:2016+A1:2018 for fire resistance
- Only for use with 44 mm thick FD30 Timber doors (not supplied)
- Available for finished wall thickness 125mm (frame thickness 100mm)
- Intumescent strips included
- Available with different options of self-close and soft closing brake (up to 90kg/leaf)
- Quick and easy installation
- Use two layers of 12,5mm fireboard each side (not supplied)

## HANDLES


The system can be used with our range of handles for sliding doors in their **different finishes**; polished brushed, polished chrome plated brass, and satin chrome plated brass. Fire rated certificated.

## VERSATILITY

This **fire rated jambs kit** are suitable with the OPTIMO pocket doors kits for doors up to 1026mm wide and 2040mm high, 125mm finished wall thickness. With additional accessories such as self close and soft close up to 90Kg/leaf.

## CERTIFICATION

The system has been independently tested and certified by **Applus+**. UNE EN 16341:2016+A1:2018: "Fire resistance and smoke control tests for door and shutter assemblies, openable windows and elements of building hardware – Part 1: Fire resistance test for door and shutter assemblies and openable windows" (equivalent to the **EN 1634- 1:2014+A1:2018**)

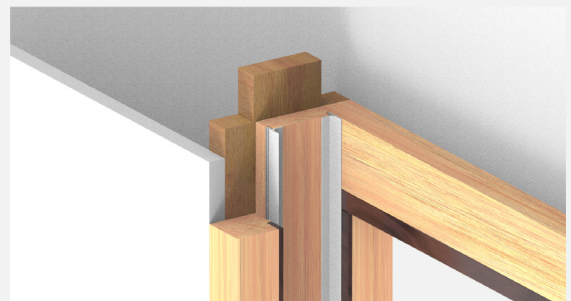

Fire rated jambs kit. MDF finish.